




TECNOCAT HANDLING
SL 1008 OUTDOOR

SL 1008 OUTDOOR

HANDLING


SL 1008 OUTDOOR

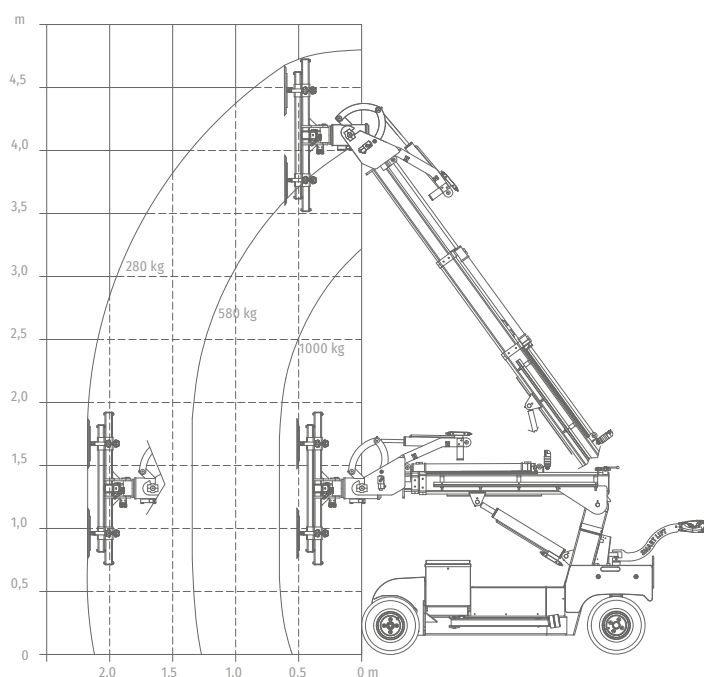

TECHNICAL DATA

DESCRIPTION	VALUE	DESCRIPTION	VALUE
Lifting cap. arm in/out	1,000 / 330 kg	Front wheel drive	2000 W AC
Lifting height	4,400 mm	Suction pads	6 x Ø400mm
Extension of arm	2 x 830 mm	Curb weight	1,300 kg
Tip from horizontal	42° back / 86° fwd	Class	IP 65
Side shift	100 mm		
Charging voltage	230V / 110V		
Charging time	Approx. 8 hrs.		
Battery	4 x 134 Ah AGM		
Running period	Up to 8 hrs.		

SL 1008 OUTDOOR

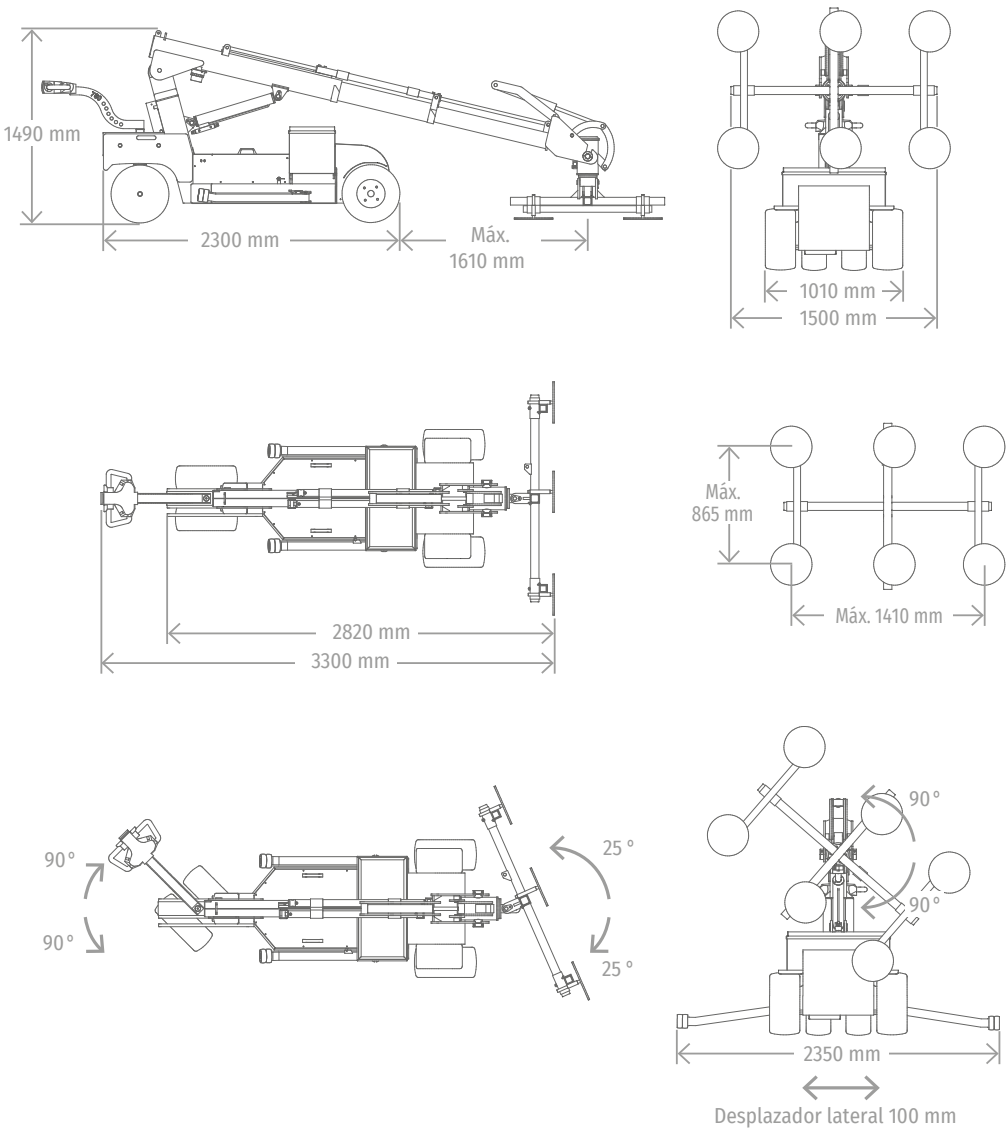

HANDLING

PICTOGRAMS



ELECTRICAL POWER



MANUAL ROTATION EQUIPMENT



NOMINAL ELECTRIC POWER



PNEUMATIC ROTATION EQUIPMENT



ENERGY AUTONOMY BY BATTERIES



MOTORIZED ROTATION EQUIPMENT



PNEUMATIC SUPPLY



HYDRAULIC ROTATION EQUIPMENT



MAXIMUM LOAD CAPACITY



EQUIPMENT WEIGHT



MAXIMUM LOAD CAPACITY ACCORDING EN-13155



VACUUM SYSTEM AIR FLOW



TILTING EQUIPMENT



PUSHBUTTON CABLE LENGTH



MANUALLY TILTING EQUIPMENT



WIRELESS PUSHBUTTON



PNEUMATIC TILTING EQUIPMENT



LOAD CAPACITY ACCORDING EN-13155



MOTORIZED TILTING EQUIPMENT



EQUIPMENT SUPPORT SYSTEM



HYDRAULIC TILTING EQUIPMENT



LIFTING CRANE USABLE ROTATION



ROTATION EQUIPMENT