



TECNOCAT HANDLING
VF4-F6 | VF4-F6+4

VF4-F6 | VF4-F6+4

HANDLING

VF4-F6



1500 kg




750 kg




225 kg



OPTIONAL:
TILTING DEVICE
(+10° TO -10°)




OPTIONAL:
BALANCE DEVICE
(+5° TO -5°)




ENH355	OK
kW	450 W
IC	—
	3 m
	OPTIONAL

	200 - 500 VAC (50 - 60 Hz) + 24 VDC
	80 L/min
	—
	—
	OK

VF4-F6

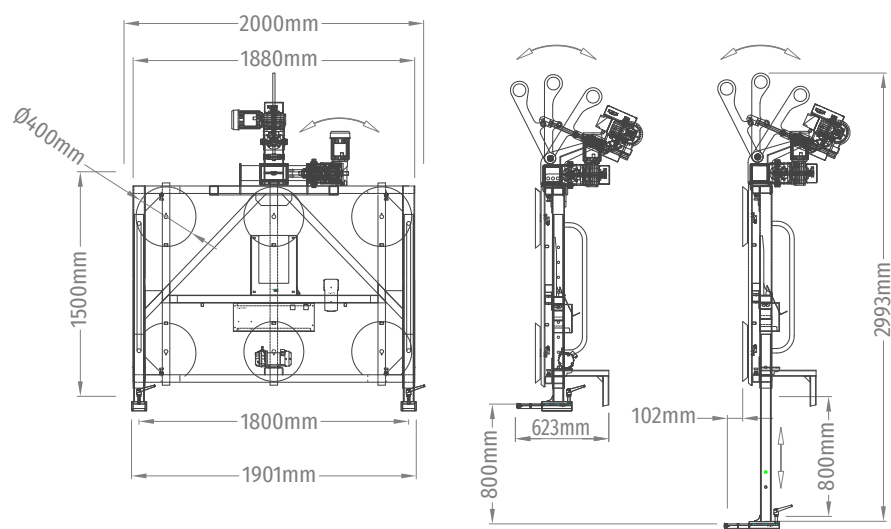

VF4-F6+4

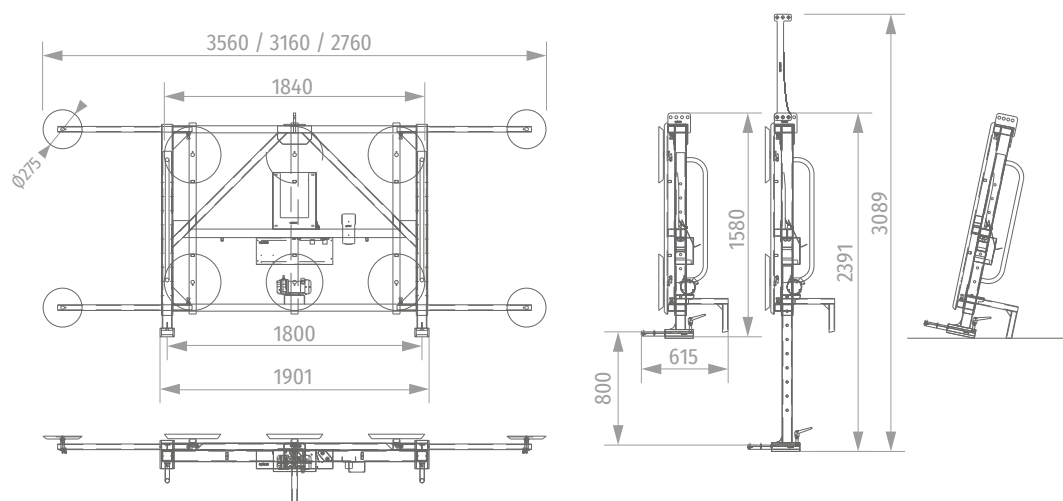

APPLICATIONS



PICTOGRAMS



ELECTRICAL POWER



MANUAL ROTATION EQUIPMENT



NOMINAL ELECTRIC POWER



PNEUMATIC ROTATION EQUIPMENT



ENERGY AUTONOMY BY BATTERIES



MOTORIZED ROTATION EQUIPMENT



PNEUMATIC SUPPLY



HYDRAULIC ROTATION EQUIPMENT



MAXIMUM LOAD CAPACITY



EQUIPMENT WEIGHT



MAXIMUM LOAD CAPACITY ACCORDING EN-13155



VACUUM SYSTEM AIR FLOW



TILTING EQUIPMENT



PUSHBUTTON CABLE LENGTH



MANUALLY TILTING EQUIPMENT



WIRELESS PUSHBUTTON



PNEUMATIC TILTING EQUIPMENT



LOAD CAPACITY ACCORDING EN-13155



MOTORIZED TILTING EQUIPMENT



EQUIPMENT SUPPORT SYSTEM



HYDRAULIC TILTING EQUIPMENT



LIFTING CRANE USABLE ROTATION



ROTATION EQUIPMENT

PICTOGRAMS



TECNOCAT 21, S.L. Av. del Coure 4, Pol.Ind. Argenteria 43470 - La Selva del Camp (Tarragona) SPAIN
+34 977 76 61 97 | info@tecnocat.com www.tecnocat.com