



TECNOCAT FACTORY SERIES

VLM2-GB1 | VLM2-GB1+2 | VLM2-GB1+4

VLM2-GB1 | VLM2-GB1+2 | VLM2-GB1+4

FACTORY SERIES

VLM2-GB1



250 kg



70 kg

VLM2-GB1+2



400 kg



80 kg

VLM2-GB1+4



400 kg




90 kg


	90° - 180° - 270° - 360°
	0° - 90°
	40 L/min
	OK

kW	480 W
	200 - 500 VAC (50 - 60 Hz)
	—


VLM2-GB1

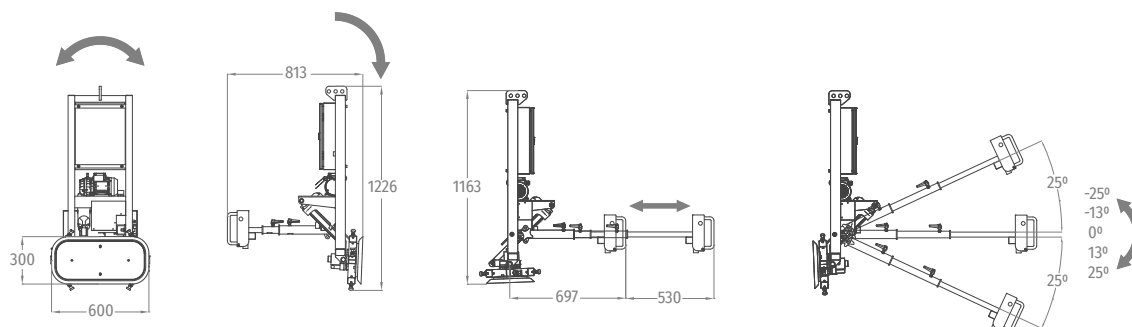

VLM2-GB1+2

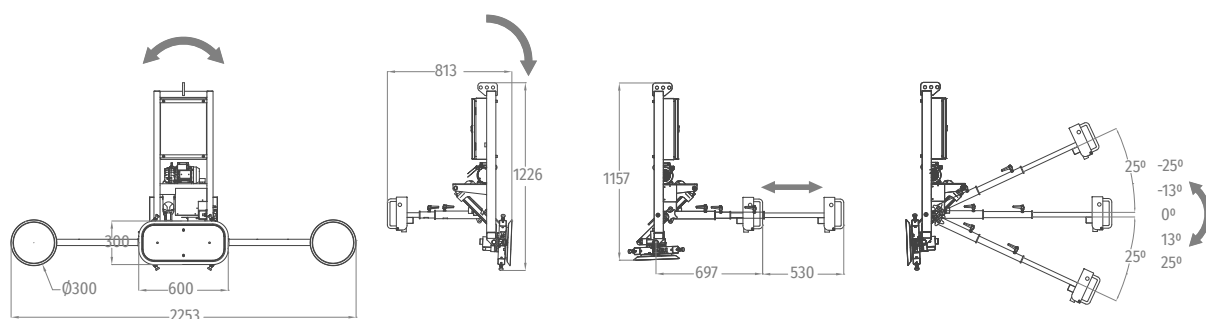

VLM2-GB1+4

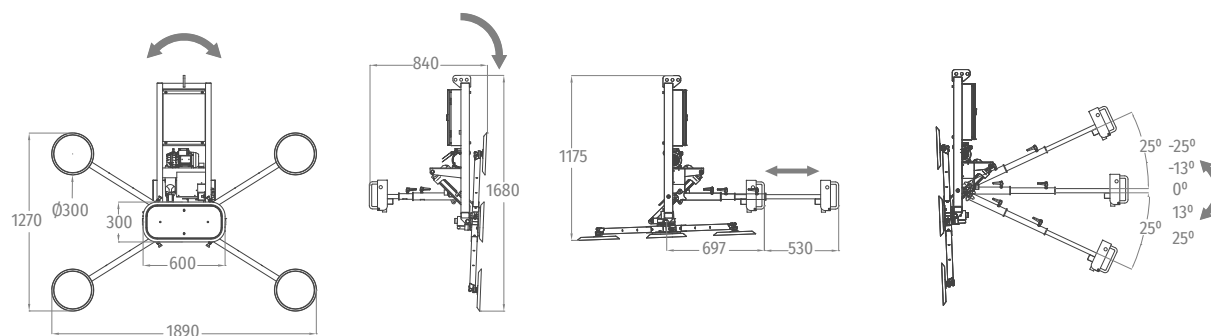

PICTOGRAMS



ELECTRICAL POWER



MANUAL ROTATION EQUIPMENT



NOMINAL ELECTRIC POWER



PNEUMATIC ROTATION EQUIPMENT



ENERGY AUTONOMY BY BATTERIES



MOTORIZED ROTATION EQUIPMENT



PNEUMATIC SUPPLY



HYDRAULIC ROTATION EQUIPMENT



MAXIMUM LOAD CAPACITY



EQUIPMENT WEIGHT



MAXIMUM LOAD CAPACITY ACCORDING EN-13155



VACUUM SYSTEM AIR FLOW



TILTING EQUIPMENT



PUSHBUTTON CABLE LENGTH



MANUALLY TILTING EQUIPMENT



WIRELESS PUSHBUTTON



PNEUMATIC TILTING EQUIPMENT



LOAD CAPACITY ACCORDING EN-13155



MOTORIZED TILTING EQUIPMENT



EQUIPMENT SUPPORT SYSTEM



HYDRAULIC TILTING EQUIPMENT



LIFTING CRANE USABLE ROTATION



ROTATION EQUIPMENT