



**TECNOCAT** HANDLING

**VX-PF**

# VX-PF

## HANDLING

### VX-PF8-400



HANDLING

### VX-PF6-180



180 kg

### VX-PF8-240



240 kg

### VX-PF6-300



240 kg

### VX-PF8-400



400 kg

### VX-PF10-500



500 kg

### VX-PF6-600



600 kg

### VX-PF8-800



800 kg

### VX-PF10-1000




1000 kg

ENH355	OK
kW	750 W
	—
	—

	230 VAC (50 - 60 Hz) Monophase OPTIONAL: 230 VAC (50 - 60 Hz) Triphase OPTIONAL: 400 VAC (50 - 60 Hz) Triphase
	80 L/min
	—

## VX-PF8-800 EXAMPLE

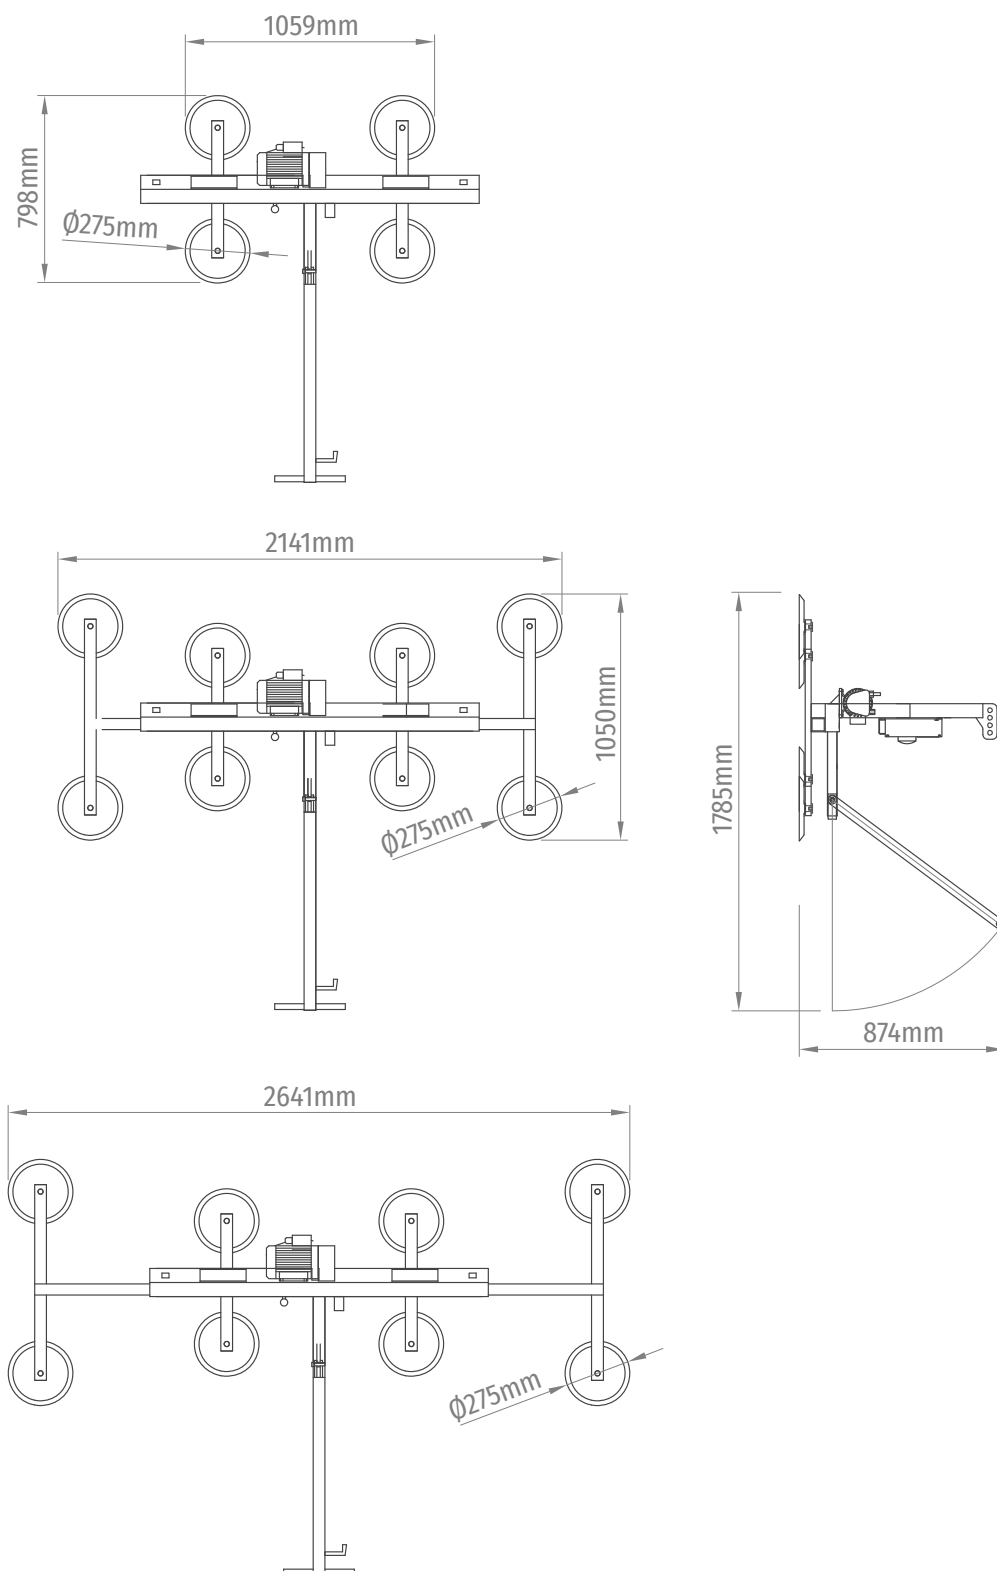

# PICTOGRAMS



ELECTRICAL POWER



MANUAL ROTATION EQUIPMENT



NOMINAL ELECTRIC POWER



PNEUMATIC ROTATION EQUIPMENT



ENERGY AUTONOMY BY BATTERIES



MOTORIZED ROTATION EQUIPMENT



PNEUMATIC SUPPLY



HYDRAULIC ROTATION EQUIPMENT



MAXIMUM LOAD CAPACITY



EQUIPMENT WEIGHT



MAXIMUM LOAD CAPACITY ACCORDING EN-13155



VACUUM SYSTEM AIR FLOW



TILTING EQUIPMENT



PUSHBUTTON CABLE LENGTH



MANUALLY TILTING EQUIPMENT



WIRELESS PUSHBUTTON



PNEUMATIC TILTING EQUIPMENT



LOAD CAPACITY ACCORDING EN-13155



MOTORIZED TILTING EQUIPMENT



EQUIPMENT SUPPORT SYSTEM



HYDRAULIC TILTING EQUIPMENT



LIFTING CRANE USABLE ROTATION



ROTATION EQUIPMENT