



**TECNOCAT** HANDLING

**VX60-BE**

# VX60-BE

## HANDLING

### VX60-BE12

### VX60-BE12

 1000 kg

 472 kg


### VX60-BE15




 1500 kg

 485 kg




HANDLING

EN4355	—
kW	950 W
	3 m.
	OK

	230 VAC (50 - 60 Hz) Monophase OPTIONAL: 230 VAC (50 - 60 Hz) Triphase OPTIONAL: 400 VAC (50 - 60 Hz) Triphase
	80 L/min
	—

## VX60-BE15

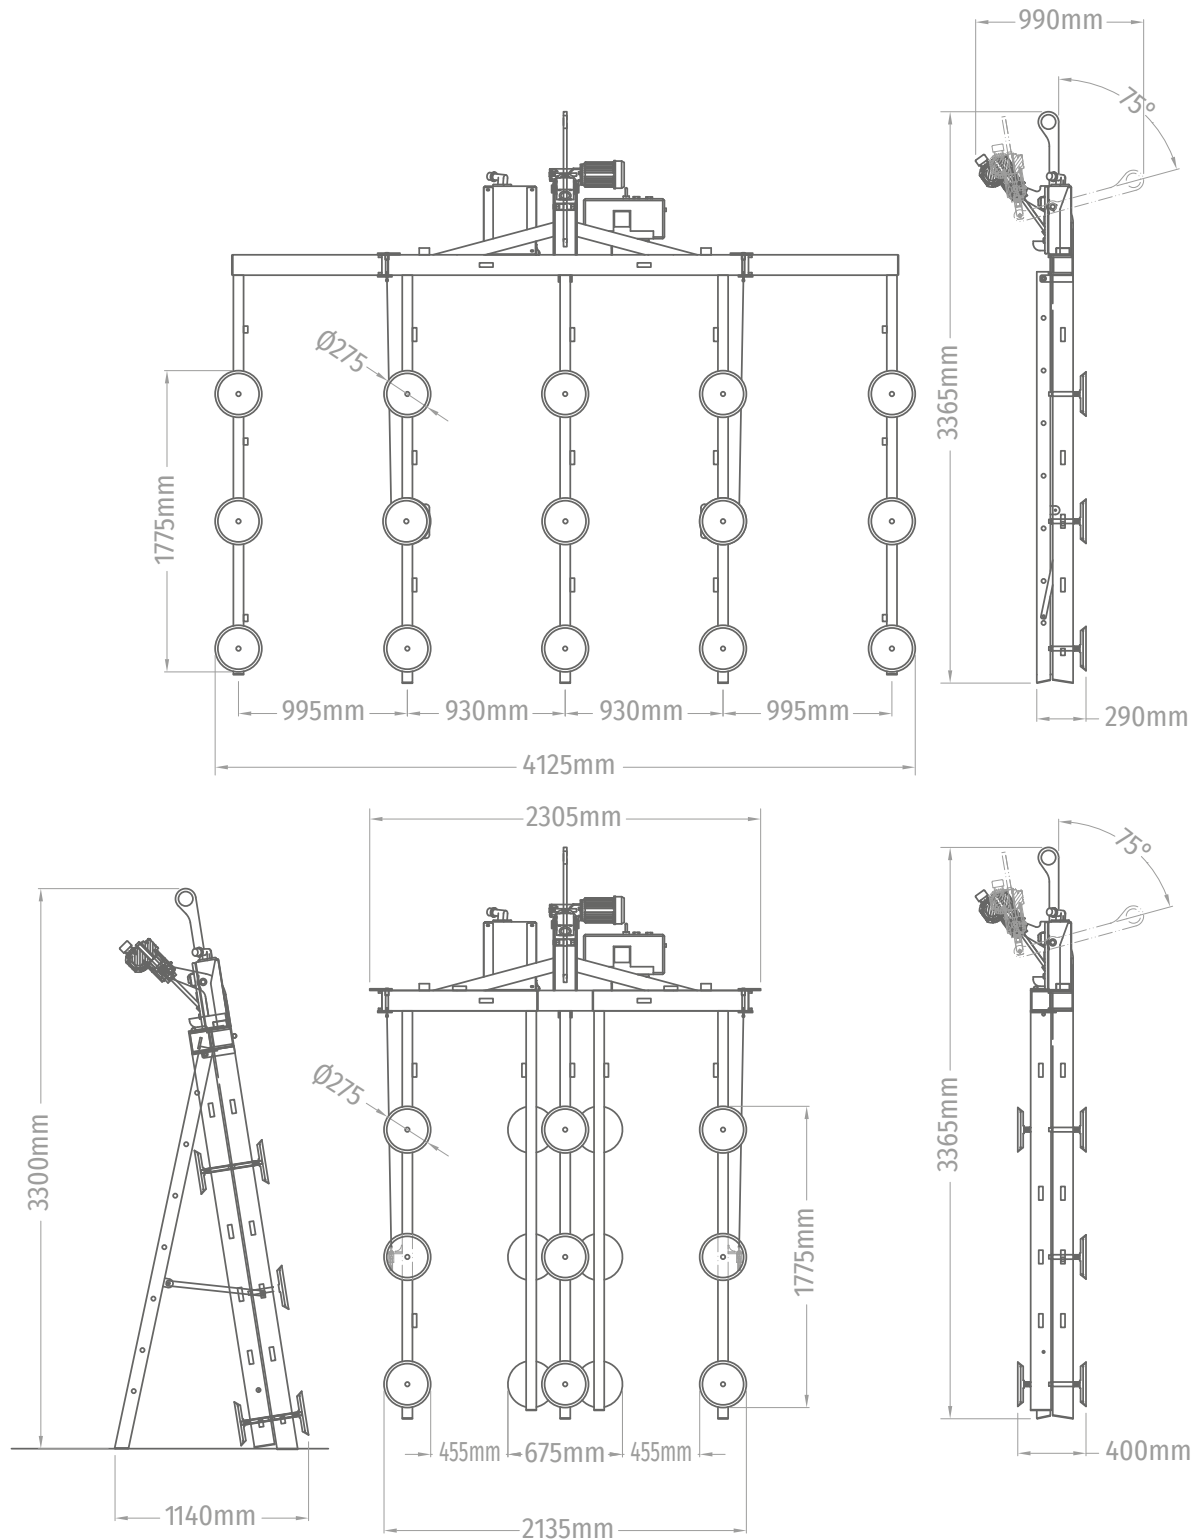

HANDLING

# PICTOGRAMS



ELECTRICAL POWER



MANUAL ROTATION EQUIPMENT



NOMINAL ELECTRIC POWER



PNEUMATIC ROTATION EQUIPMENT



ENERGY AUTONOMY BY BATTERIES



MOTORIZED ROTATION EQUIPMENT



PNEUMATIC SUPPLY



HYDRAULIC ROTATION EQUIPMENT



MAXIMUM LOAD CAPACITY



EQUIPMENT WEIGHT



MAXIMUM LOAD CAPACITY ACCORDING EN-13155



VACUUM SYSTEM AIR FLOW



TILTING EQUIPMENT



PUSHBUTTON CABLE LENGTH



MANUALLY TILTING EQUIPMENT



WIRELESS PUSHBUTTON



PNEUMATIC TILTING EQUIPMENT



LOAD CAPACITY ACCORDING EN-13155



MOTORIZED TILTING EQUIPMENT



EQUIPMENT SUPPORT SYSTEM



HYDRAULIC TILTING EQUIPMENT



LIFTING CRANE USABLE ROTATION



ROTATION EQUIPMENT