


ML-B

ELEVATION SYSTEMS



ML-B

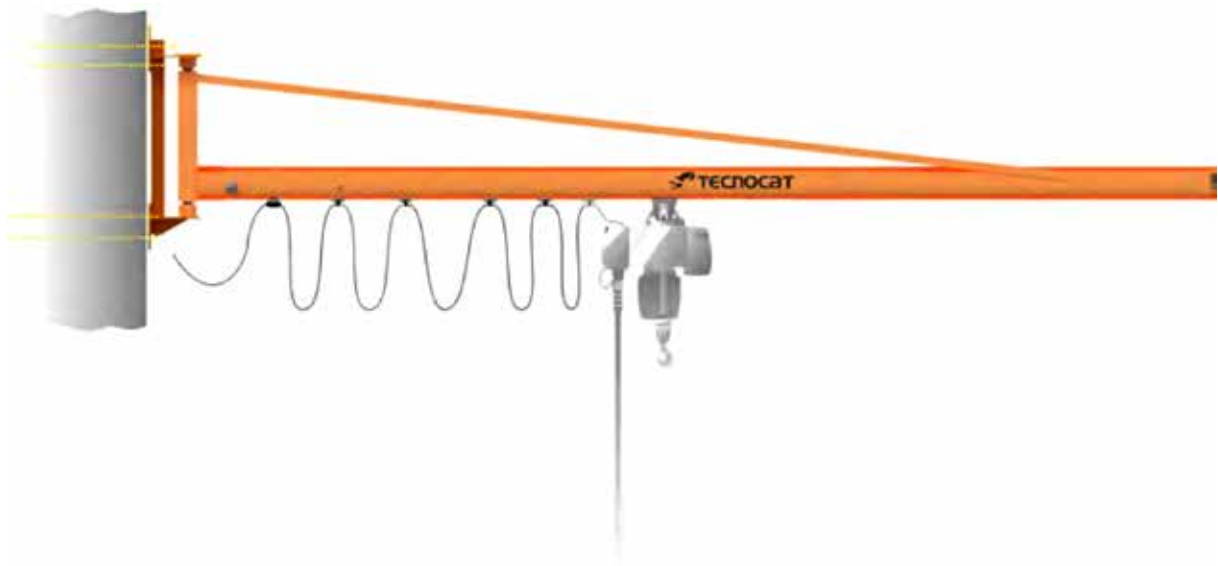


**METAL COLUMN WELDING +
REINFORCED BRACKETS**



CONCRETE COLUMN BRACKETS

			A (kg.)	B (°)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Fh (kN)	Fv (kN)
ML-B4-250	250 kg	180°	4000	140	932	4470	5360	240	1025	18	6,5
ML-B5-250	250 kg	180°	5000	140	932	4470	5360	240	1025	22,4	6,7
ML-B6-250	250 kg	180°	5795	140	932	4470	5360	240	1025	27,2	7
ML-B7-250	250 kg	180°	7000	140	1080	4480	5660	240	1325	26,6	8
ML-B4-500	500 kg	180°	4000	140	932	4470	5360	240	1025	30,9	9,7
ML-B5-500	500 kg	180°	5000	140	932	4470	5360	240	1025	38,8	9,9
ML-B6-500	500 kg	180°	5795	140	932	4470	5360	240	1025	46,1	10,2
ML-B7-500	500 kg	180°	7000	140	1080	4480	5660	240	1325	44	11,1

ML-B

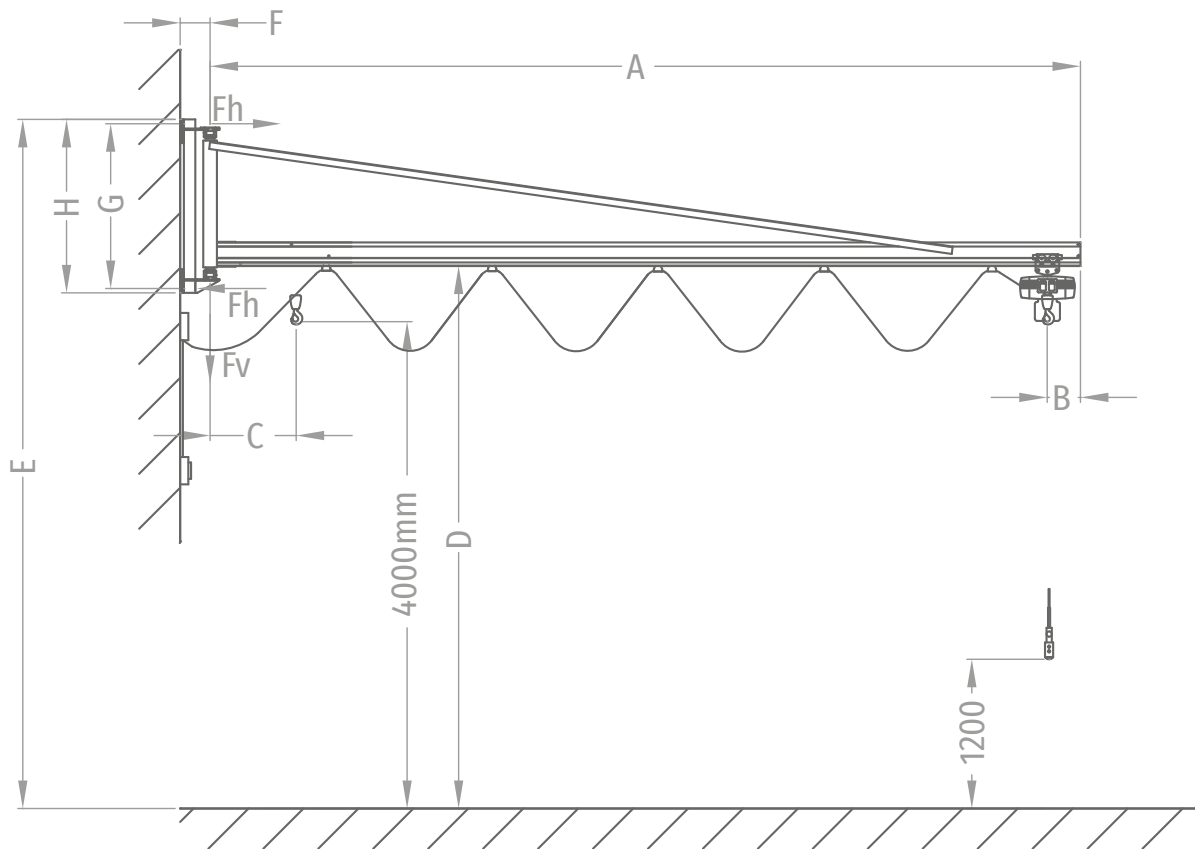

D: RECOMMENDED WORKING HEIGHT

ROTATION: 180° OR 270° DEPENDING ON THE EXISTING SUPPORT

OPTIONAL

- HOIST 250 KG. OR 500 KG.