




CL-B | CL-BP


ELEVATION SYSTEMS

CL-B

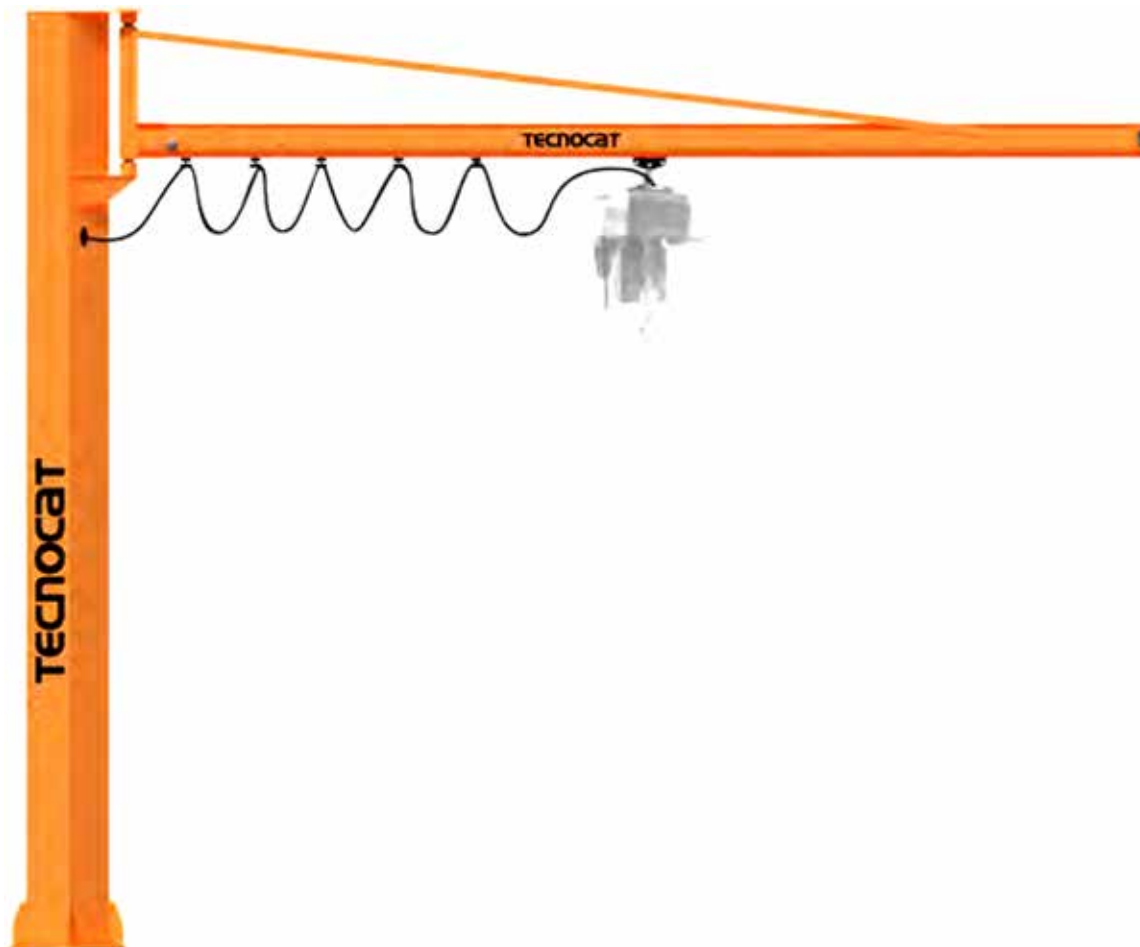

			A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Mf (kNm)	Fn (kN)
CL-B4-250	250 kg	270°	4000	140	932	4400	5250	350	1400	900	20,7	11,2
CL-B5-250	250 kg	270°	5000	140	932	4400	5250	350	1500	900	25,2	11,5
CL-B6-250	250 kg	270°	5795	140	932	4400	5250	350	1600	900	29,9	11,7
CL-B7-250	250 kg	270°	7000	140	1080	4400	5520	455	1700	900	37,7	14,5
CL-B4-500	500 kg	270°	4000	140	932	4400	5250	350	1600	900	35,2	14,4
CL-B5-500	500 kg	270°	5000	140	932	4400	5250	350	1700	900	43,4	14,7
CL-B6-500	500 kg	270°	5795	140	932	4400	5250	350	1900	1100	50,9	14,9
CL-B7-500	500 kg	270°	7000	140	1080	4400	5520	455	2000	1100	62,5	17,7

CL-B 250/500

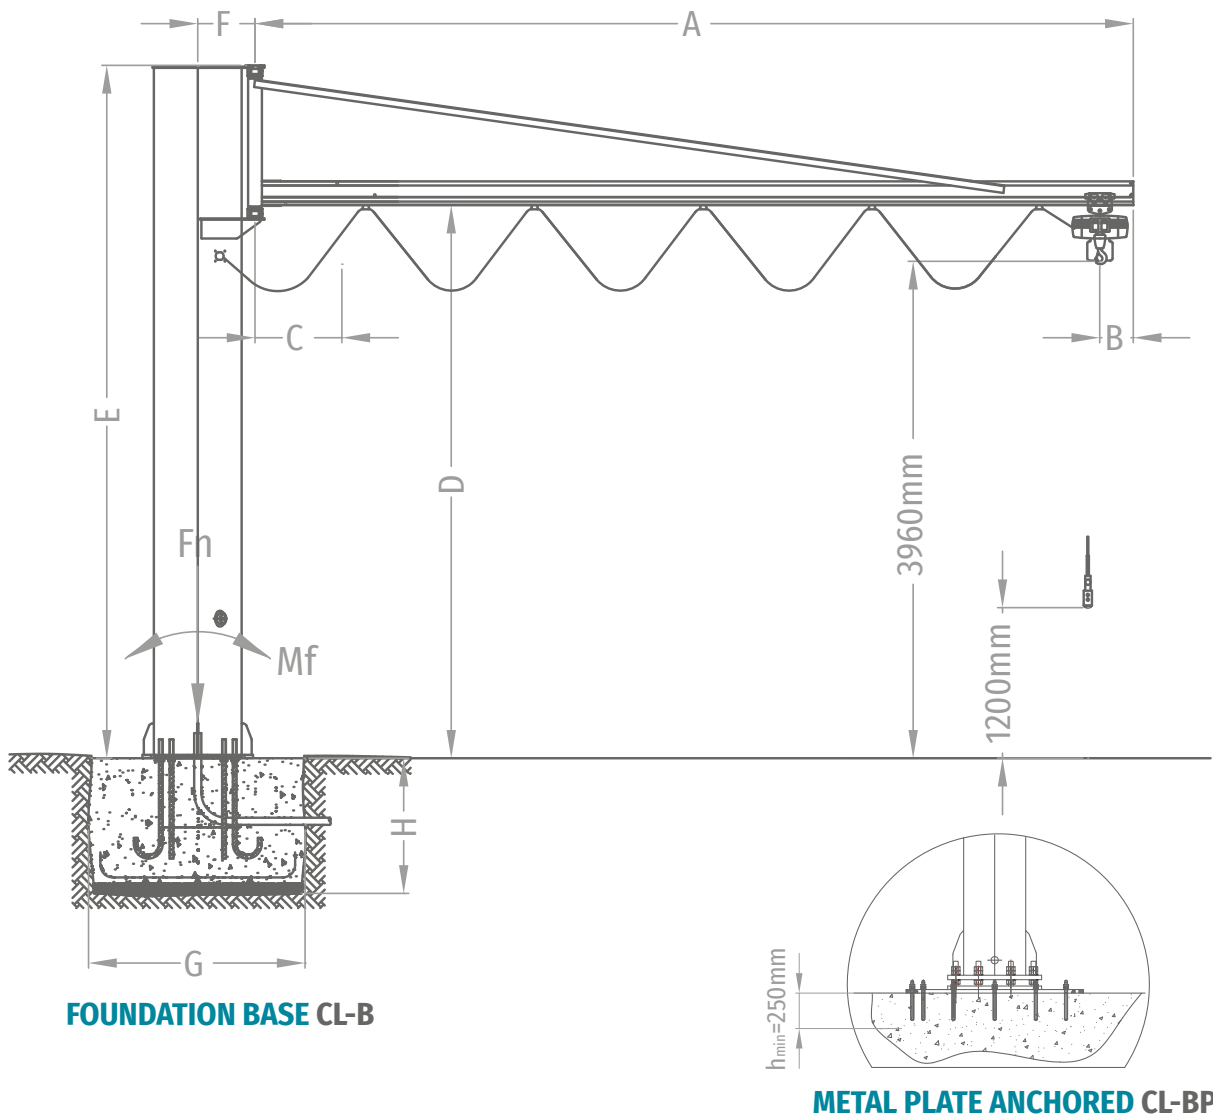

OPTIONAL

- HOIST 250 KG. OR 500 KG.
- METAL PLATE BASE